

sales@awaretech.com

# STAT FAX® 4700

Programmable Open System

ELISA Microstrip Reader




Stat Fax, serving laboratory needs worldwide for more than 25 years




The Stat Fax 4700 is ideal for reading ELISA microwell strips in laboratories and institutions where small runs of ELISA assays are routine. Assays can easily be programmed using the touch screen interface with filters ranging from 340 nm - 630 nm. The robust instrument is factory calibrated and maintenance free.

## Features of the Stat Fax 4700


- ◆ Economical open system & Compact design
- ◆ Three strip loading capacity
- ◆ Automatically positions each strip for reading
- ◆ Multiple calculation modes
- ◆ Touch screen display and on-board printer
- ◆ Dependable maintenance-free design
- ◆ Up to 120 user programmable stored tests
- ◆ Test results in 30 seconds per 12 well strip
- ◆ Custom filter configurations available

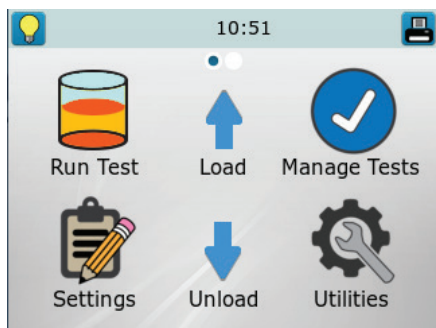

Updated interface for easy navigation

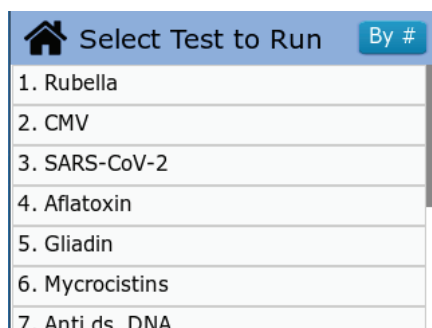

Simple to use graphically driven utilities (example tests shown)

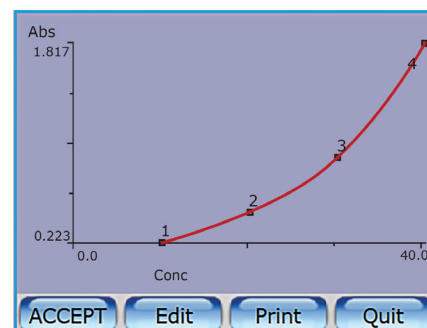

High resolution capacitive touch display

# STAT FAX® 4700

## Semi-automated ELISA Programmable Strip Reader

<b>Linear Measurement Range</b>	0.0 to 3.0 Absorbance units (A)
<b>Photometric Accuracy</b>	+/- (1% +/- 0.010) 0.0 through 1.5 ABS +/- (2% +/- 0.010) 1.5 through 3.0 ABS
<b>Stability</b>	Drift of no more than 0.005A in 8 hours/bichromatic
<b>Light Source</b>	Tungsten-Xenon lamp with lamp saver feature
<b>Standard Wavelengths</b>	Standard: 405, 450, 492, and 630 nm 6-VIS: 405 - 630 nm 6-UV: 340 - 630 nm
<b>Vessel</b>	Non break apart or break apart strips up to 12 wells long 3 strip loading capacity, (for break apart wells, partial strips or even a single well can be read)
<b>Transport mechanism</b>	Auto-Track™ automatic strip transport Detection Mode
<b>Display</b>	Interactive touch screen 3.5" (8 cm) LCD, color graphic display
<b>Printer</b>	Thermal with graphic capability, approximately 29 characters per line
<b>Speed</b>	Reads, calculates and prints results, in approximately 30 seconds per 12-well strip
<b>Calculation Modes</b>	Single point calibration by standard or factor, multi-point calibration with point-to-point curve fit, linear regressions with log, linear, and log-logit selections
<b>Test Storage</b>	120 open channels to store tests Stores all parameters including wavelengths, calculations, unit codes, ranges, interpretations, calibrator values, test names, and previous curve
<b>Dimensions &amp; weight</b>	Approximately 9"x13.5"x5" (24x34x13 cm) weight: 5 lbs (2.3 kg)

ISO 13485:2016



**Awareness Technology, Inc. USA & International**  
tel: +1 772 283 6540 sales@awaretech.com

**Awareness Technology, Inc. Europe**  
tel: +43 (0) 2236 892465 info@awaretech.eu

**Awareness Technology, Inc. Asia & Africa**  
tel: +971 (06) 557 80 58 info@awaretech.com



**Dri-Dye® Check Strips**

For performance verification of Stat Fax®, ChroMate®,  
and other microstrip and microplate readers